



Efficiency and Economy

Media Volume Required

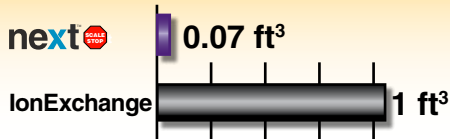


Backwash Volume


(gal/ backwash/ft³)

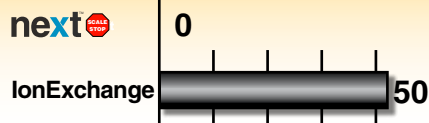

Service Frequency

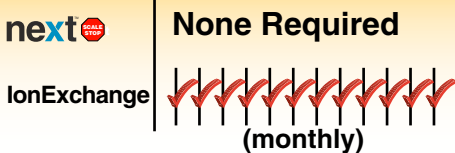

Regenerant Volume (per regeneration)

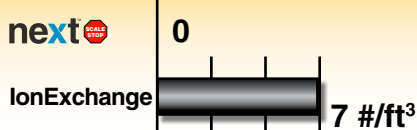

Applications



From residential to commercial to industrial, **nextScaleStop** delivers extraordinary performance and value.

Introduction

next-ScaleStop is the embodiment of a new technology, Template Assisted Crystallization (TAC). Atomic level Templates on the surface of small specially treated polymer spheres transform dissolved CaCO₃ to a crystalline form. The crystals are relatively insoluble, effectively isolating the CaCO₃ from the water chemistry and anything the water contacts.

Features

- **Extremely efficient - 5 seconds** contact time regardless of hardness level. Conventional Ion Exchange resin requires **90 seconds**.
- No salt or other chemical regenerants required.
- No backwash waste. Can be used in areas where water softeners are banned. Protects the environment and reduces water usage.
- Long lasting media-not consumed by the reactions.
- No control valve or electricity required.
- Media can be used in both conventional mineral tanks or POU cartridge form.
- Media operates in upflow condition.

Applications

next-ScaleStop has proven itself in a variety of applications as an alternative to ion exchange softening or other conventional water treatment methods. The maintenance-free characteristics make it especially suited for Foodservice and Commercial applications where equipment maintenance is often overlooked.

Foodservice

- Coffee & Tea Brewers
- Espresso Machines
- Boiler based Steamers
- Proofer Ovens
- Steam Tables
- Mist Cooling Systems

Commercial/Industrial

- Car Washes
- Evaporative Cooling
- Hotels
- Boilers

Residential

- Water Heater
- Laundry
- Dishwasher
- Bath and Shower

Operating Conditions

- Service Flow: 4 gpm/liter of media. System flow limited by bed expansion
- Bed Depth: 4-10 inches typical depending upon flow rate.
- Freeboard: 200% of bed depth, (minimum 20")
- Can be used in continuous or intermittent operation
- Operates in upflow mode, no backwash required.

Regulatory Approvals



nextScaleStop is
tested and certified by the
Water Quality Association to
NSF/ANSI Standard 61.

nextTM filtration
technologies inc.
6586 Hypoluxo Road, Suite 362
Lake Worth, FL 33467
email: info@nextfiltration.com
web: www.nextfiltration.com

Distributed By: Quick Water Heater & Filtration Co.